


# FLOW-THROUGH HOUSING AD 82/25-RV

06/07

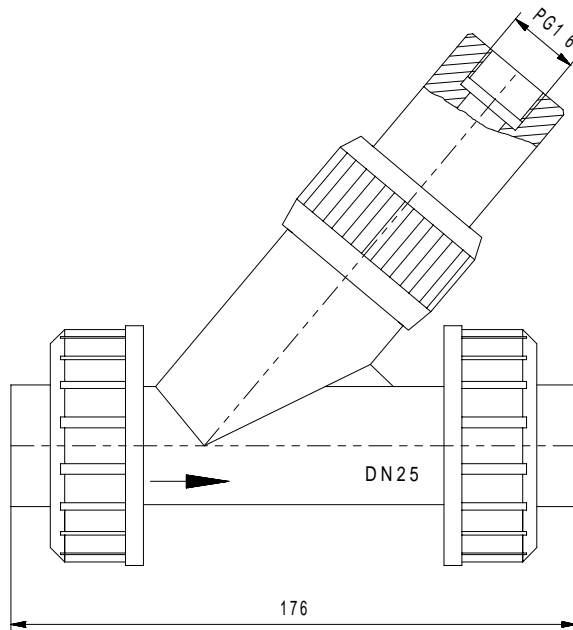

Dimension : mm

The bevel seat flow-through housing AD 82 is used for installation in piping and pre-eminently for insertion of a process dissolved oxygen probe. The special construction features optimal flow conditions for the sensor and a self-cleaning action for the membrane of the oxygen sensor.

## Specifications

<b>Sensor port</b>	1 port pre-eminently for a dissolved oxygen probe with shaft diameter 18 mm, PG 16 thread and 120 mm immersion length
<b>Material</b>	PVC
<b>Temperature range</b>	max. 50 °C
<b>Pressure</b>	up to 20 °C max. 10 bar up to 40 °C max. 5 bar up to 50 °C max. 3.5 bar
<b>Process connections</b>	DN 25 pipe thread port (other glue ports, flange ports, screw ports or hose ports are available) mounting pre-eminently vertically; sensor laterally up to 30 ° from vertical

## Sensortechnik Meinsberg GmbH

Quality System certified to DIN EN ISO 9001

Kurt-Schwabe-Straße 6  
D-04720 Ziegra-Knobelsdorf /GERMANY

Internet: [www.meinsberg.de](http://www.meinsberg.de)  
Tel. +49 34327 623-0  
Fax +49 34327 623-79

