


Flow-through housing AD 92/20-RV

The bevel seat flow-through housing AD 92 made of PVC is used for installation in piping and insertion of an pH or redox electrode or a conductivity cell with PG 13.5 threaded shaft or PG 13.5 threaded plug head, a diameter of 12 mm and an immersion length of 120 mm

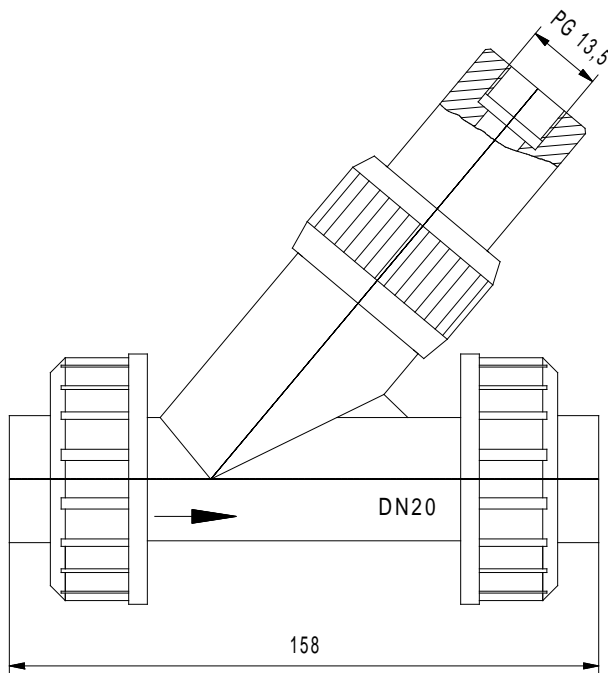

Dimensions in mm

Specifications

Sensor port

1 port with for insertion of electrodes/sensors 12 mm diameter, 120 mm immersion length and thread PG 13.5

Material

PVC

Temperature range

max. 50 °C

Pressure

up to 20 °C max. 10 bar
up to 40 °C max. 5 bar
up to 50 °C max. 3,5 bar

Process connection

- DN 20 glue port (other pipe ports, flange ports, screw ports or hose ports are available)
- mounting pre-eminently in a vertical medium pipe
- sensor laterally up to 30° from vertical

Sensortechnik Meinsberg GmbH

Quality System certified to DIN EN ISO 9001

Meinsberg, Kurt-Schwabe-Straße 6
D-04736 Waldheim/Germany

Internet: www.meinsberg.de
Tel.: +49 (0) 34327 623-0
Fax: +49 (0) 34327 623-79

